


MHT 100

6 CHANNEL AUDIO/VIDEO SYSTEM CONTROLLER (TUNER READY)

McIntosh
The Compendium

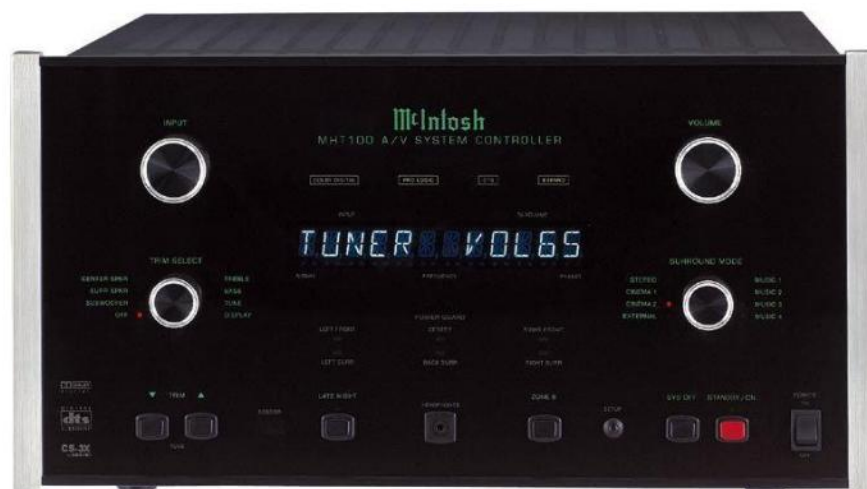

FRONT PANEL: Glass with illuminated teal/gold nomenclature. **INPUT.** Operating mode display: DOLBY DIGITAL, PRO LOGIC, DTS and EXPAND. **VOLUME.** ⚡ **TRIM SELECT** switch: OFF, SUBWOOFER, SURROUND SPEAKER, CENTER SPEAKER, TREBLE, BASS, TUNE, DISPLAY. Digital display: ZONE B / SIGNAL strength, % VOLUME / FREQUENCY and ZONE A / PRESET. **POWER GUARD** lights: LEFT FRONT, CENTER, RIGHT FRONT, LEFT SURROUND, RIGHT/BACK SURROUND. **SURROUND MODE** switch: EXTERNAL, CINEMA 2, CINEMA 1, STEREO, MUSIC 1, MUSIC 2, MUSIC 3, MUSIC 4. ⚡ **Touch buttons:** ▼TRIM / TUNE, TRIM / TUNE▲. **IR SENSOR.** Touch button: LATE NIGHT (with indicator). **HEADPHONES** jack. Touch button: ZONE B. **SETUP** button. Touch buttons: **SYS OFF, STANDBY/ON** (with indicator), **POWER ON** and **OFF**. AM/FM **TM 1** tuner is optional.



BACK PANEL: FUSE. Power cord receptacle. ⚡ **COMPONENT VIDEO** inputs 1 and 2: Y, PR and PB. Zone A monitor **COMPONENT VIDEO** outputs: Y, PR and PB. **KEYPAD** connectors: ZONE A and B. **IR INPUTS:** **IR POWER** switch: OFF or ON, inputs for ZONE A and ZONE B. **POWER CONTROL** out for ZONE A and ZONE B, Accessory, and VIDEO. ⚡ **DATA** ports for TUNER, AUX, CD, SAT, TV, DVD, VCR 1, VCR 2, HOME, SUM, SUM A. ⚡ **Optical DIGITAL INPUTS:** CD 1, SAT and LV. **Coaxial DIGITAL INPUTS:** AUX, CD and SAT.

MHT 100

6 CHANNEL AUDIO/VIDEO SYSTEM CONTROLLER (TUNER READY)

McIntosh

The Compendium

Coaxial and optical DIGITAL OUTPUTS. RS232 POWER connector. ↗ S-video and composite VIDEO INPUTS: AUX, CD, SAT, TV, DVD, VCR 1 and VCR 2. S-video and composite VIDEO OUTPUTS: ZONE A MONITOR, VCR 1 and VCR 2. Composite VIDEO OUTPUT for ZONE B MONITOR. ↗ Analog AUDIO INPUTS: TUNER, AUX, CD, SAT, TV, DVD, VCR 1, VCR 2. Analog AUDIO OUTPUTS: ZONE A, VCR 1 RECORD, VCR 2 RECORD, ZONE B. ↗ 8-channel inputs for EXTERNAL PROCESSOR: LF, C, RF, LS, RS, BSL, BSR and SUB. PREAMP OUTPUT // POWER AMP INPUT: LF, C, RF, LS, RS, BSL, BSR. PREAMP OUTPUT for SUB. ZONE B POWER AMP INPUTS. ZONE B PREAMP OUTPUT // POWER AMP INPUTS. ↗ SPEAKER output binding posts for ZONE A: LF, C, RF, LS, RS, BSR and ZONE B Left and Right. ↗ Spaces reserved for optional **TM 1** tuner module: ANTENNA 2: external AM ANTENNA (**RAA1**) and 75 Ω FM ANTENNA coax input.

SPECIFICATIONS: 100w/ch into 4 ohms or 80w/ch into 8 ohms. **Response:** 20-20kHz (+0 -0.25dB). **Distortion:** .05%. **Signal to Noise Ratio:** power amp - 112dBA. **Output Load Impedance:** 4 ohms or 8 ohms. **Input Impedance:** Power Amp 20k, aux 20k. **Input Sensitivity:** Power Amp 1.0V, Aux 1V (6V max). **Tone Controls:** boost or cut 10dB. **Power Guard.** **Sentry Monitor.** **Direct coupled.**

Power Requirements: 120V at ?? Watts. Has hand remote **HR044** and **HR093** replacement.



MHT 100 - Sold from 2001-2003. S/N: TP1001~TP????

Size: 9-1/2"H, 17-1/2"W and 20"D. **Weight:** 92 lb. **\$5,000.00**