

FRONT PANEL: LED/fiber-optic illuminated green/gold nomenclature. Disc drawer. 🕏 IR display. Touch buttons: ■STOP, > PLAY, STANDBY/ON (with indicator), POWER: ON or OFF.




BACK PANEL: Power cord receptacle. • Power control: In and out. DATA control INput. IR senor input. 2 COAXIAL DIGITAL AUDIO OUTPUT. 2 OPTICAL DIGITAL AUDIO OUTPUT. Balanced XLR digital audio output.

SPECIFICATIONS: Readout: 3 beam GaAIAs laser 780nm. Digital Output: 0.5V p-p/75 ohm (coaxial); -15dBm to -20dBm (optical); 5V p-p @ 110 ohms (AES/EBU) (XLR). Sampling Frequency: 44.1 KHz. Digital Audio Format: IEC958, S/PDIF. Has HR069 hand remote.

Power Requirements: 120 Volts, at 20 watts.



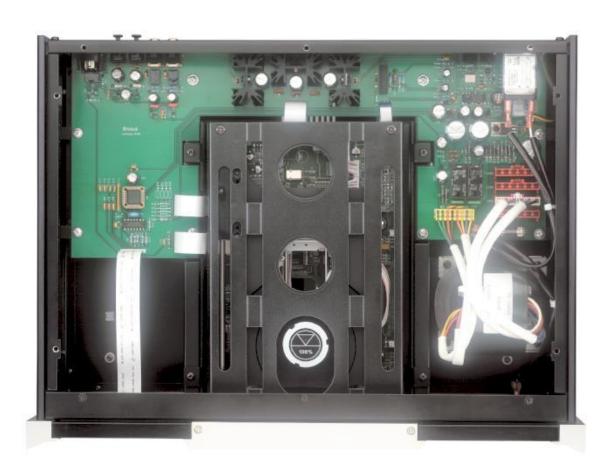



MCD 1000 - Sold from December 2003 - 2010. S/N: VH1001~VH???? (?,???? UNITS) Size: 6"H, 17-1/2"W and 16-1/8"D behind panel. Weight: 27-1/2 lb. \$7,000.00