


MHT 100

6 CHANNEL AUDIO/VIDEO SYSTEM CONTROLLER
(TUNER READY)

McIntosh
The Compendium

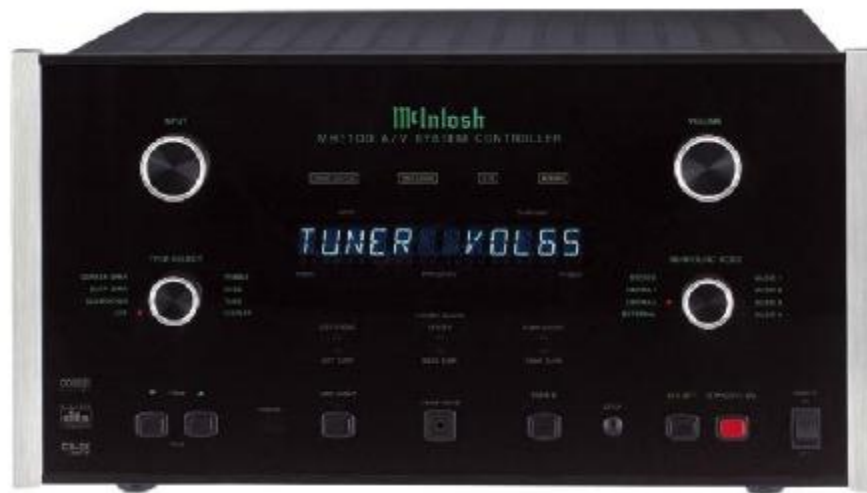

FRONT PANEL: Glass with illuminated teal/gold nomenclature. INPUT. Operating mode display: DOLBY DIGITAL, PRO LOGIC, DTS and EXPAND. VOLUME. ⚡ TRIM SELECT switch: OFF, SUBWOOFER, SURROUND SPEAKER, CENTER SPEAKER, TREBLE, BASS, TUNE, DISPLAY. Digital display: ZONE B / SIGNAL strength, % VOLUME / FREQUENCY and ZONE A / PRESET. POWER GUARD lights: LEFT FRONT, CENTER, RIGHT FRONT, LEFT SURROUND, RIGHT/BACK SURROUND. SURROUND MODE switch: EXTERNAL, CINEMA 2, CINEMA 1, STEREO, MUSIC 1, MUSIC 2, MUSIC 3, MUSIC 4. ⚡ Touch buttons: ▼TRIM / TUNE, TRIM / TUNE▲. IR SENSOR. Touch button: LATE NIGHT (with indicator). HEADPHONES jack. Touch button: ZONE B. SETUP button. Touch buttons: SYS OFF, STANDBY/ON (with indicator), POWER ON and OFF. AM/FM **TM 1** tuner is optional.



BACK PANEL: FUSE. Power cord receptacle. ↗ COMPONENT VIDEO INPUTS 1 and 2: Y, PR and PB. Zone A monitor COMPONENT VIDEO OUTPUTS: Y, PR and PB. KEYPAD connectors: ZONE A and B. IR INPUTS: IR POWER switch: OFF or ON, inputs for ZONE A and ZONE B. POWER CONTROL out for ZONE A and ZONE B, Accessory, and VIDEO. ↗ DATA ports for TUNER, AUX, CD, SAT, TV, DVD, VCR 1, VCR 2, HOME, SUM, SUM A. ↗ Optical DIGITAL INPUTS: CD 1, SAT and LV. Coaxial DIGITAL INPUTS: AUX, CD and SAT.

MHT 100

6 CHANNEL AUDIO/VIDEO SYSTEM CONTROLLER (TUNER READY)

McIntosh

The Compendium

Coaxial and optical DIGITAL OUTPUTS. RS232 POWER connector. ↗ S-video and composite VIDEO INPUTS: AUX, CD, SAT, TV, DVD, VCR 1 and VCR 2. S-video and composite VIDEO OUTPUTS: ZONE A MONITOR, VCR 1 and VCR 2. Composite VIDEO OUTPUT for ZONE B MONITOR. ↗ Analog AUDIO INPUTS: TUNER, AUX, CD, SAT, TV, DVD, VCR 1, VCR 2. Analog AUDIO OUTPUTS: ZONE A, VCR 1 RECORD, VCR 2 RECORD, ZONE B. ↗ 8-channel inputs for EXTERNAL PROCESSOR: LF, C, RF, LS, RS, BSL, BSR and SUB. PREAMP OUTPUT // POWER AMP INPUT: LF, C, RF, LS, RS, BSL, BSR. PREAMP OUTPUT for SUB. ZONE B POWER AMP INPUTS. ZONE B PREAMP OUTPUT // POWER AMP INPUTS. ↗ SPEAKER output binding posts for ZONE A: LF, C, RF, LS, RS, BSR and ZONE B Left and Right. ↗ Spaces reserved for optional **TM 1** tuner module: ANTENNA 2: external AM ANTENNA (**RAA1**) and 75 Ω FM ANTENNA coax input.

SPECIFICATIONS: 100w/ch into 4 ohms or 80w/ch into 8 ohms. **Response:** 20-20kHz (+0 -0.25dB). **Distortion:** .05%. **Signal to Noise Ratio:** power amp - 112dBA. **Output Load Impedance:** 4 ohms or 8 ohms. **Input Impedance:** Power Amp 20k, aux 20k. **Input Sensitivity:** Power Amp 1.0V, Aux 1V (6V max). **Tone Controls:** boost or cut 10dB. **Power Guard.** **Sentry Monitor.** Direct coupled.

Power Requirements: 120V at ?? Watts. Has hand remote **HR044** and **HR093** replacement.



MHT 100 - Sold from 2001-2003. S/N: TP1001~TP????

Size: 9-1/2"H, 17-1/2"W and 20"D. **Weight:** 92 lb. **\$5,000.00**