

MC 126

SIX CHANNEL POWER AMPLIFIER

CONFIGURABLE TO 5, 4 OR 3 CHANNELS

McIntosh

The Compendium



FRONT PANEL: Glass with illuminated teal/gold nomenclature. Remote ON indicator light.

⚡ **POWER GUARD** lights for LEFT FRONT, CENTER, RIGHT FRONT, LEFT SURROUND, BACK SURROUND, and RIGHT SURROUND. **POWER switch:** OFF or ON.



BACK PANEL: **POWER switch:** LOCAL or REMOTE. Power cord receptacle. **FUSE.** [Right front and surround section: **RIGHT SURROUND** and **RIGHT FRONT/MONO INPUTS**. **RIGHT SURROUND** and **RIGHT FRONT LEVEL** controls: **2.5V** to **1.0V**. **MODE switch:** **MONO** or **STEREO**. Speaker **OUTPUTS** terminals: **RIGHT SURROUND**, **RIGHT FRONT** and **MONO**]. [Back surround and center channel section: **BACK SURROUND** and **CTR/MONO INPUT**. **BACK SURROUND** and **center/MONO LEVEL** controls: **2.5V** to **1.0V**. **MODE switch:** **MONO** or **STEREO**. Speaker **OUTPUTS** terminals: **BACK SURROUND**, **center** and **MONO**]. **MULTI-CHANNEL 26 pin INPUT** connector. **POWER CONTROL** jacks: **IN** and **OUT**. [Left surround and front section: **LEFT SURROUND** and **LEFT FRONT/MONO INPUTS**. **LEFT SURROUND** and **LEFT FRONT/MONO LEVEL** controls: **2.5V** to **1.0V**. Speaker **OUTPUT** terminals: **LEFT SURROUND**, **LEFT FRONT** and **MONO**].


SPECIFICATIONS: Six channels. **120w/ch** into 4 ohms or **80w/ch** into 8 ohms. (**275w** into 8 ohms mono with 2 channels bridged). **Response:** 20-20kHz (+0 -0.25dB). **Distortion:** 0.005%. **Noise and Hum:** -113dBA. Output direct coupled for 4 to 8 ohms. **Damping Factor:** 100 or greater. **Input impedance:** 20k. **Input Sensitivity:** .8V. Sentry Monitor. Direct coupled. Power Guard. **Power Requirements:** 120V at 5.9 Amps.

MC 126

SIX CHANNEL POWER AMPLIFIER

CONFIGURABLE TO 5, 4 OR 3 CHANNELS

McIntosh
The Compendium

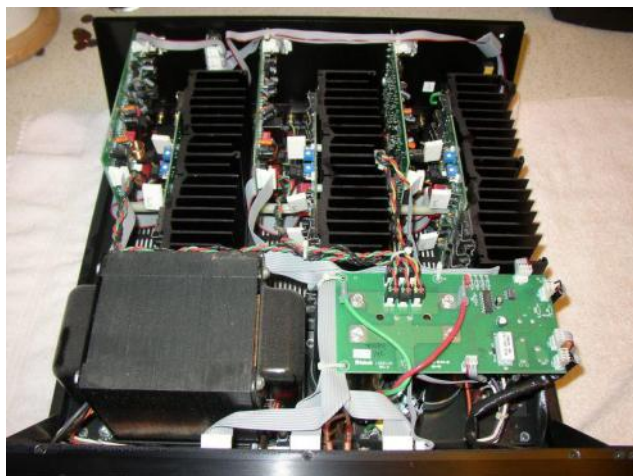

MC 126 - Sold from 2001 - 2003. S/N: TA1001~ TA????

Size: 7-1/8"H, 17-1/2"W and 18"D. **Weight:** 58 lb. **\$3,100.00**