

MC 240 (MID)

STEREO POWER AMPLIFIER

McIntosh
The Compendium



CONTROLS & CONNECTORS: Chrome/black chassis. Speaker OUTPUT: LEFT and RIGHT barrier strips for 4, 8 and 16 ohms. LINE OUTPUT octal socket for 600 Ω /70.7V output. STEREO PREAMP POWER octal output socket powers **McIntosh C 8, C 4, C 104, or C 108** preamps. GAIN controls: TWIN AMP, BALANCE and MONO. Input switch: STEREO, TWIN AMP or MONO. ⚡ Power cord. FUSE 3.2A. 300 W A.C. ONLY outlet. LINE VOLTAGE switch: 117V or 125V. INPUTS: STEREO, TWIN and MONO.




MC 240 (MID)

STEREO POWER AMPLIFIER

McIntosh
The Compendium

SPECIFICATIONS: 40w/ch stereo, 80w mono. **Response:** 16-40kHz (+0 -0.1dB). **Distortion:** 0.5%. **Noise & Hum:** -90dB. **Output Impedance:** 4, 8, 16, 125 and 600 ohms. 600 ohm center tap internally grounded. (2, 4, 8, 16 and 32 ohms in mono). **Output Voltages:** 25 (isolated), 70.7 (one side grounded) and 140V (center tap grounded). **Internal Impedance:** less than 10% of rated impedance. **Input Impedance:** 250k. **Input Sensitivity:** 0.5V (in mono or twin amp). 2.0V in stereo. *Unity Coupled.* **Power Requirements:** 120V at 270 Watts.

TUBES: 4-6L6GC/7027A output, 3-12AX7, 2-12AU7, 2-12BH7. Solid state rectifier.

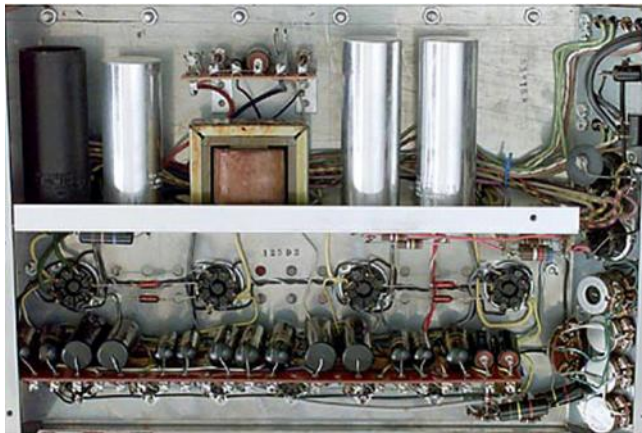

MC 240 (MID)

STEREO POWER AMPLIFIER

McIntosh
The Compendium



MC 240 (MID) "Spotting features": **1.** Side **McIntosh** and **240** nomenclature has thin brushed metal letters with black drop-shadow. **2.** Tube cage has small square openings. **3.** Speaker terminal strips are on the left of angled front. **4.** Two octal receptacles on angled front. **5.** Fuse is on the vertical front.

MC 240 (MID) - Sold from August 1961 – September 1965. S/N: 100D1~999D9 (8,019 UNITS)

Size: 8"H, 10-3/4"W and 17-1/4"D. **Weight:** 56 lb. **\$288.00**