

C 2300

TUBE STEREO PRE-AMPLIFIER

McIntosh

The Compendium



FRONT PANEL: Glass with LED/fiber-optic illuminated green/gold nomenclature. Illuminated left and right **RELATIVE OUTPUT LEVEL** meters (DECIBELS). ⚡ **INPUT SELECTOR**. **TRIM SELECT**. Digital display. **TRIM ADJUST**. **VOLUME**. ⚡ **1/4" HEADPHONES** jack. IR sensor. Touch buttons (with indicator lights): **TONE BYPASS**, **MONO**, **RECORD MONITOR**, **SETUP**, **MUTE**, **OUTPUTS 1 AND 2**, **STANDBY/ON**.



BACK PANEL: Left and Right balanced **OUTPUTS**: MAIN, 2, and 1. Left and Right balanced **INPUTS**: 7-CDR, 6-CD, 5-DA and 4-DVD. 2 GROUND binding posts. ⚡ Left and Right unbalanced **OUTPUTS**: MAIN, 2, 1 and SERVER. Unbalanced **INPUTS**: SERVER, CDR, CD, D/A, DVD, TUNER. PHONO 2/MM, 1/MC. ⚡ Power cord receptacle. FUSE. **POWER CONTROL** outputs: MAIN, ACC, output 2 and 1. **PASS THRU** power control. Coax **EXTERNAL SENSOR** connector. **DATA PORTS**: 8-SERVER, 7-CDR, 6-CD, 5-DA, 4-DVD, 3-TUNER.

SPECIFICATIONS: **Response:** 20-20kHz (+0 -0.5dB). **Distortion:** 0.08%. **Noise and Hum:** - 93dB high level, -80dB phono. **Maximum Output:** 8V unbalanced, 16V balanced. **Output Impedance:** 220 ohms. **Input Sensitivity and Impedance:** high level 0.45V (2.5V max) at 20k unbalanced and 40k balanced, phono MM 4.5mV (50mV max) at 47k ohms; 50 to 750pF. **Power Requirements:** 120V at 75 Watts. Has **HR061** hand remote and **HR093** replacement.


TUBES: 6-12AX7A. Solid state rectifier bridges.

C 2300

TUBE STEREO PRE-AMPLIFIER

McIntosh

The Compendium

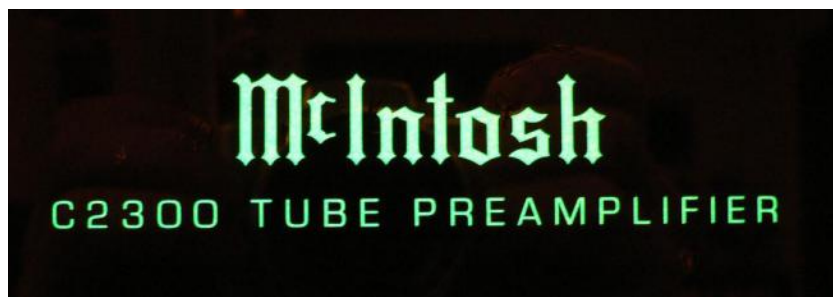

C 2300 -Sold from 2008 - 2015. S/N: YA1001~YA3433 (2,432 UNITS)

Size: 6"H, 17-1/2"W and 18"D behind panel. **Weight:** 29.5 lb.

\$6,000.00