

# MC 2105

## STEREO POWER AMPLIFIER

McIntosh  
The Compendium



**FRONT PANEL:** Glass with illuminated teal/gold nomenclature. Illuminated left and right POWER LEVEL meters (meters read +3 at 100w). Power indicator light. ⚡ LEFT GAIN control. METER RANGE switch: -20, -10, 0 and OFF. RIGHT GAIN control. HEADPHONES jack. SPEAKERS switch: OFF or ON. POWER switch: OFF or ON. PANLOC buttons.




**BACK PANEL:** LEFT and RIGHT speaker OUTPUT barrier strips. AC OUTLET. Power cord. FUSE. INPUT COUPLING switch: DIRECT or NORMAL. LEFT and RIGHT audio INPUT. Panloc mounting.

**SPECIFICATIONS:** 105w/ch. Response: 20-29kHz (+0 -0.1dB). **Distortion:** 0.25%. **Noise and Hum:** 90dB. **Output Impedance:** 4, 8 and 16 ohms. **Damping Factor:** 10. **Input Impedance:** 200k. **Input Sensitivity:** 0.5v. **Headphone Impedance:** low. Sentry Monitor. *Autoformers.*

**CABINET:** L 14 Also fits L 21 and L 54

**PANLOC BRACKETS:** Right – 043-678 / Left – 043-679

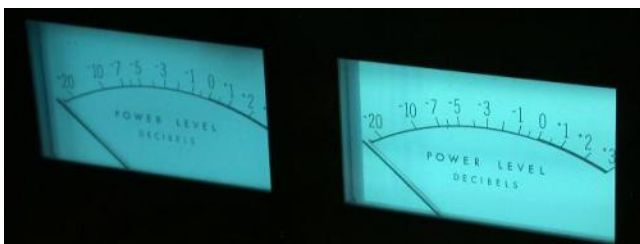

# MC 2105

## STEREO POWER AMPLIFIER

McIntosh  
The Compendium



**MC 2105** - Sold from November 1967 - 1978. S/N: 10M01~99M99, AH1001~AH9999 & BT1001~BT2719 (19,714 UNITS)

**Size:** 7-1/8"H, 16-3/16"W and 14-1/2"D. **Weight:** 65 lb. **\$799.00**