

# MC275 G

## STEREO POWER AMPLIFIER

McIntosh  
The Compendium



**CONTROLS & CONNECTORS:** Titanium gold plated stainless steel/black chassis. LEFT and RIGHT speaker OUTPUT barrier strips for 4, 8 and 16 OHMS. Left and Right (MONO) audio XLR BALANCED INPUTS jacks. Left and Right (MONO) UNBALANCED LEVEL controls: 2.5V to 1.0V. ⚡ POWER switch OFF or ON. Left and Right (MONO) audio UNBALANCED INPUTS. MODE switch: MONO or STEREO. INPUTS switch: BALANCED or UNBALANCED.

**RIGHT SIDE CONNECTORS:** Power cord receptacle. FUSE.




**SPECIFICATIONS:** 75w/ch stereo, 150w mono. **Response:** 20-20kHz (+0 -0.2dB). **Distortion:** 0.5%. **Noise & Hum:** -100dB (A weighted). **Output Impedance:** 4, 8, 16 ohms. (2, 4, and 8 ohms in mono), 25V line. **Damping Factor:** greater than 10. **Input Impedance:** 100k unbalanced, 180k balanced. **Input Sensitivity:** 1.0V unbalanced, 2.0V balanced. *Unity Coupled.* **Power Requirements:** 120V at 6.3 Amps.

**TUBES:** 4-KT88/6550 output, 3-12AX7A, 4-12AZ7. Solid state rectifier bridge.

# MC275 G

## STEREO POWER AMPLIFIER

McIntosh  
The Compendium

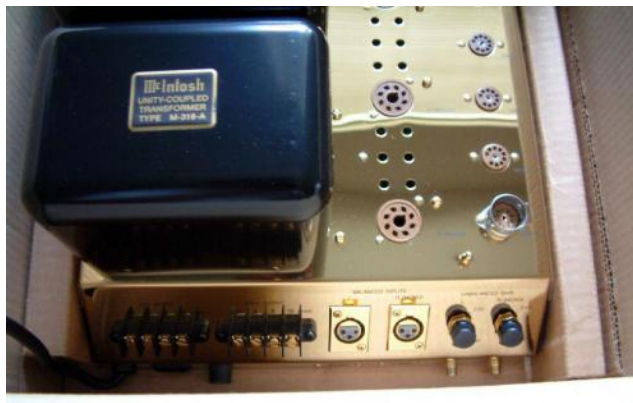

**MC275 G features:** 1. Hybrid PCB/Point-to-point wiring. 2. Stainless steel chassis with gold finish. 3. 450 v power supply. 4. Same design as CE.

**MC275 G "Spotting features":** 1. Gold finish. 2. Gain controls. 3. Unbalanced inputs on far right-hand side of the vertical front. 4. Power cord and fuse are on the vertical front. 5. Convenience outlet on vertical front panel. 6. Silver McIntosh 275 emblem.

**MC275 G** - Sold from 1998 - 1999. S/N: MC275G-01~MC275G-71 (70 UNITS)

**Size:** 7-1/2"H, 12"W and 16"D. **Weight:** 67 lb. **\$9,800.00**