

MC 30 (A 116B)

MONAURAL POWER AMPLIFIER

McIntosh
The Compendium



CONTROLS & CONNECTORS: Chrome/black chassis. Speaker OUTPUT barrier strip for 4, 8 and 16 ohms as well as 0.5V INPUT. 0.5V INPUT. GAIN control. ⚡ Power cord. FUSE. A.C. OUTLET 300 WATTS. Octal OUTPUT socket powers **McIntosh C 8, C 4, C 104, or C 108** preamps. Octal socket PRE-AMP. INPUT. HUM ADJUSTMENT.




SPECIFICATIONS: 30w. **Response:** 20-30kHz (+0.1 -0.1dB). **Distortion:** 0.5%.
Noise & Hum: - 90dB. **Output Impedance:** 4, 8, 16, and 600 ohms. 600 ohm balanced to ground. 4, 8 and 16 ohms isolated from ground. **Damping Factor:** 12 for 4, 8 and 16 ohms. **Input Impedance:** 500k. **Input Sensitivity:** 0.5V. *Unity Coupled.*

TUBES: 2-1614 output, 2-12AX7, 12AU7, 12BH7, 5U4. Late versions supplied with variable damping control.

MC 30 (A 116B)

MONAURAL POWER AMPLIFIER

McIntosh
The Compendium

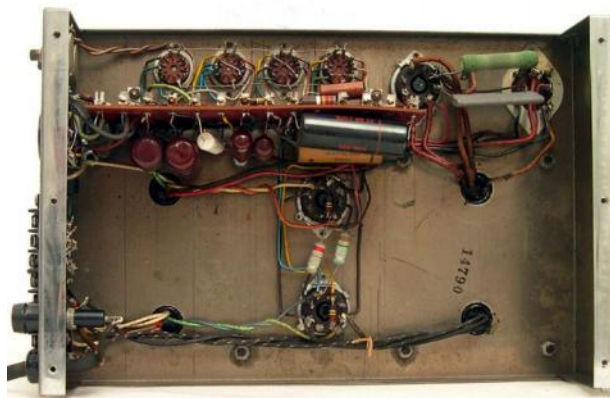

MC 30 - Sold from July 1954-June 1962. S/N: 10,000~23,655 & 1E001~10E592
(14,246 UNITS)

Size: 8"H, 8"W and 13"D. **Weight:** 30.5 lb. **\$153.00**

MC 30A (A 116BA) – Same as **MC 30**, but with the **DK 30-60** variable damping kit installed.