

# MC 502

## STEREO POWER AMPLIFIER

McIntosh  
The Compendium



**FRONT PANEL:** Glass with illuminated teal/gold nomenclature. POWER GUARD lamps: NORMAL or LIMIT. LEFT GAIN control. RIGHT/MONO GAIN control. HEADPHONES jack. SPEAKERS switch: OFF or ON. POWER switch: OFF or ON. PANLOC buttons.



**BACK PANEL:** LEFT and RIGHT speaker OUTPUT barrier strip. UNSWITCHED AC outlet. Power cord. FUSE. MODE switch: STEREO or MONO. Left and Right (MONO) audio INPUT. INPUT LEVEL switch: 2.5v or .75v. Panloc mounting.

**SPECIFICATIONS:** 50w/ch into 8 ohms, 75w/ch into 2.7 to 4 ohms. (150w mono into 8 ohms). **Response:** 20-20kHz (+0 -0.25dB). **Distortion:** 0.02%. **Noise and Hum:** -95dB. Output direct coupled for 2.7 to 8 ohms. **Damping Factor:** 50 or greater. **Input Impedance:** 75k. **Input Sensitivity:** 0.75v or 2.5v. **Headphone Impedance:** low. Sentry Monitor. Power Guard. Direct coupled.



**CABINET:** L 50



# MC 502

## STEREO POWER AMPLIFIER

**McIntosh**  
The Compendium

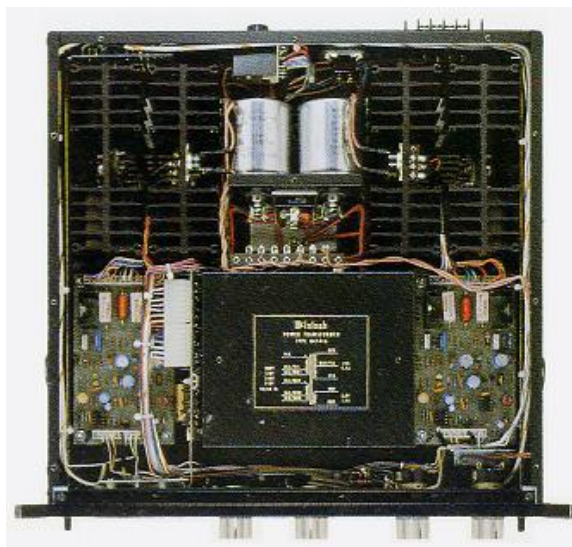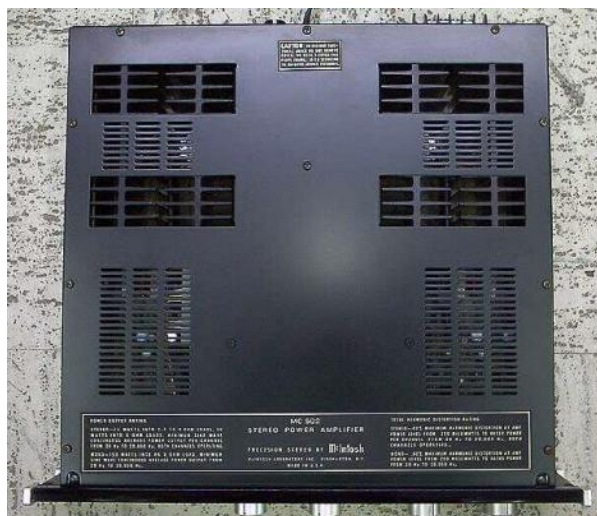

**MC 502** - Sold from December 1978 - 1989. S/N: CE1001~CE4031 (3,030 UNITS)

**Size:** 3-5/8"H, 16"W and 14-1/2"D. **Weight:** 27 lb. **\$1,200.00**