

MC 225

STEREO POWER AMPLIFIER

McIntosh
The Compendium



CONTROLS & CONNECTORS: Chrome/black chassis. Line **OUTPUTS** octal socket for 70V/600 OHM output. Speaker **OUTPUT:** LEFT and RIGHT barrier strips for 4, 8 and 16 OHMS. **STEREO-MONO** switch. LEFT and RIGHT/MONO **GAIN** controls. ⚡ Power cord. **FUSE.** 117V AC 400 WATTS outlet. Left and Right audio **INPUTS.**





SPECIFICATIONS: 25w/ch stereo, 50w mono. **Response:** 18-30kHz (+0 -0.1dB). **Distortion:** 0.5%. **Noise & Hum:** -90dB. **Output Impedance:** 4, 8, 16, 150, 200 and 600 ohms. 600 ohm balanced to ground and center tapped. (2, 4, 8 and 16 ohms in mono). **Output Voltages:** 25 and 70.7V. **Internal Impedance:** less than 10% of rated impedance. **Input Impedance:** 250k. **Input Sensitivity:** 0.5V (2.0V with gain controls at dot indicator). **Unity Coupled.** **Power Requirements:** 117V at 200 Watts.

TUBES: 4-7591 output, 12AX7, 2-12AU7, 2-12BH7. Solid state rectifier.

MC 225

STEREO POWER AMPLIFIER

McIntosh
The Compendium

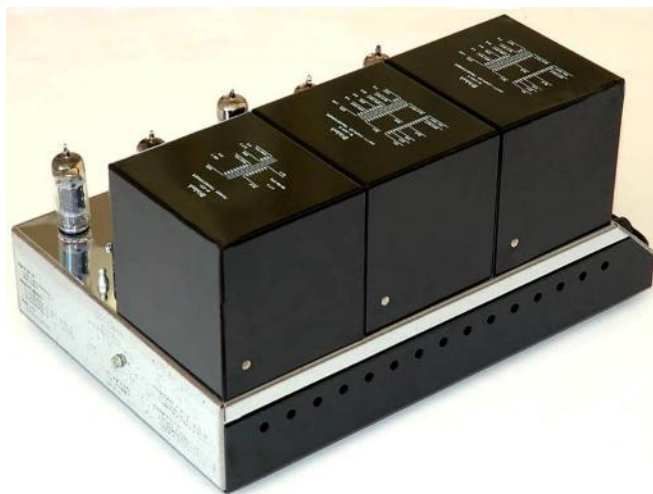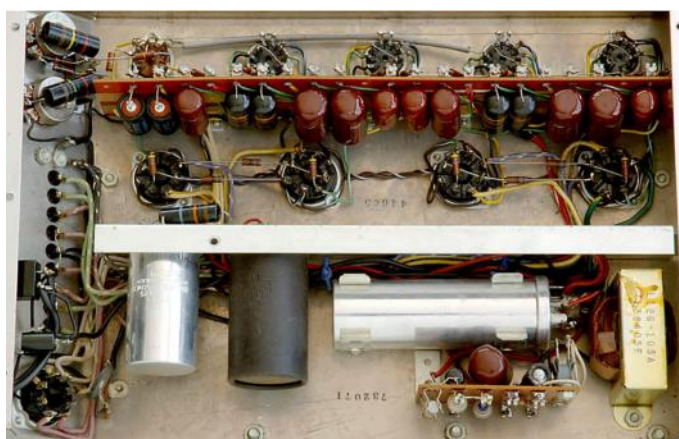

MC 225 - Sold from June 1961 - August 1967. S/N: 100C1~700C6 (5,591 UNITS)

Size: 7"H, 9-1/8"W and 14-1/2"D. **Weight:** 34 lb. **\$198.00**