

C 22 CE

STEREO PRE-AMPLIFIER

McIntosh
The Compendium



FRONT PANEL: Glass with illuminated teal/gold nomenclature and gold anodized aluminum panel. **BALANCE:** LEFT to RIGHT. **INPUT SELECTOR** (with indicator lights): TAPE 2, TAPE 1, CD, TUNER, PHONO 1, PHONO 2, AUX 1, AUX 2. **MODE SELECTOR** (with indicator lights): L TO L+R, R TO L+R, STEREO REV, STEREO, MONO (L+R), L+R TO L and L+R TO R. **VOLUME.** ⚡ LEFT BASS control. RIGHT BASS control. Rocker switches: TAPE 1 NORMAL or MONITOR, TAPE 2 NORMAL or MONITOR. **POWER:** ON or OFF. **AUX 2 INPUT** jack. **SPEAKERS** switch: OFF, 1, 2, 1 & 2. **HEADPHONES** jack. Rocker switches: **RUMBLE:** FLAT or FILTER, **HF:** FLAT or FILTER. **LOUDNESS:** NORMAL or COMPENSATED. **LEFT TREBLE** control. **RIGHT TREBLE** control.



BACK PANEL: AC outlets: 4 SWITCHED, 1 UNSWITCHED. LEFT and RIGHT BALANCED OUTPUTS. ⚡ **OUTPUTS:** SWITCHED: 1 and 2, MAIN, TAPE 2, TAPE 1. **HIGH LEVEL INPUTS:** AUX 1, TAPE 2, TAPE 1, CD, TUNER. **LOW LEVEL INPUTS:** PHONO 1 and PHONO 2. Ground binding post. ⚡ Power cord. speaker control relay socket. Tube cover.


SPECIFICATIONS: **Response:** 20-20kHz (+0 -0.5dB). **Distortion:** 0.02% IHF. **Noise and Hum:** - 90dBA high level, -80dBA re 10mV phono. **Output Rated:** 2.5v, 8V max. **Input Sensitivity and Impedance:** high level 0.25V at 22k, phono 2.2mV at 47k and 65pF. **Individual Tone Controls:** bass and treble +20dB to -20dB. **Rumble Filter:** 50Hz at 12dB/octave. **HF Filter:** 5kHz at 12dB/octave. **Voltage Gain:** 20dB aux, 61dB phono. **Power Requirements:** 120V at 37 Watts.

TUBES: 3-12AT7, 4-12AX7. Solid state rectifier.

C 22 CE

STEREO PRE-AMPLIFIER

McIntosh
The Compendium

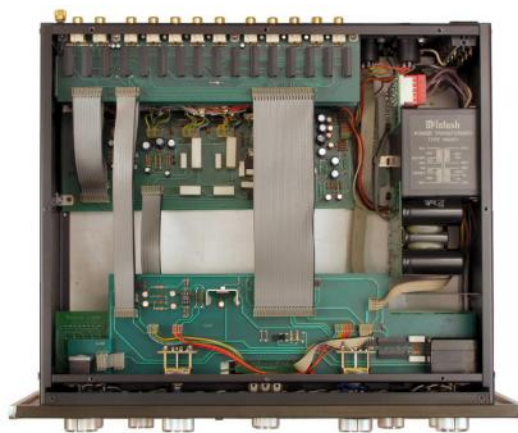

C 22 CE - Sold from 1995 - 1998. S/N: LK1001~LK????

Size: 5-7/16"H, 16"W and 14"D behind panel. **Weight:** 16 lb. **\$2,500.00**