

C 30

STEREO PRE-AMPLIFIER

McIntosh

The Compendium




FRONT PANEL: Glass with illuminated teal/gold nomenclature. INPUT SELECTOR: AUX, VCR, TV, LASER, CD, TUNER, PHONO. EQUALIZER FREQUENCY controls: 30, 150, 500, 1500 and 10K, HEADPHONE VOLUME, VOLUME. ⚡ MODE SELECTOR: L TO L+R, R TO L+R, STEREO REVERSE, STEREO, MONO (L+R), L+R TO L and L+R TO R. TAPE 2 INPUT and OUTPUT jacks. Pushbutton switches (with indicator lights): TAPE 1 MONITOR: IN or OUT, TAPE 2 MONITOR: IN or OUT, TAPE COPY: 1►2, TAPE COPY: 2►1. LF-HF FILTER: IN or OUT. SPEAKER/OUTPUT 1: IN or OUT, SPEAKER/OUTPUT 2: IN or OUT. POWER: ON or OFF. HEADPHONES jacks. Concentric BALANCE: L to R / LOUDNESS: FLAT to MAX. PANLOC buttons.



BACK PANEL: OUTPUTS: 2, 1, MAIN, LINE, TAPE 1, TAPE 2. EXTERNAL PROCESSORS: MAIN: TO and FROM, TAPE: TO and FROM. INPUTS: TAPE 1, AUX, VCR, TV LASER, CD, TUNER, PH. ⚡ Power cord. FUSE. TURNTABLE POWER: AUTO-MANUAL switch, UNSWITCHED AC outlet (TURNTABLE POWER), AUTO-ON SENSITIVITY: MIN to MAX. 6 SWITCHED AC outlets. speaker control relay socket. GROUND binding post. Panloc mounting.

SPECIFICATIONS: **Response:** 20-20kHz (+0 -0.5dB). **Distortion:** 0.007%. **Noise and Hum:** - 100dB aux, -90dB phono. **Output Rated:** 2.5V. **Maximum Output:** 10V **Input Sensitivity and Impedance:** high level 0.20V (10V max) at 22k, phono 2mV (100mV max) at 47k and 65pF. **Program Equalizer:** 30, 150, 500, 1500 and 10,000Hz boost or cut 12dB. **LF Filter:** 50Hz at 12dB/octave. **HF Filter:** 7kHz at 12dB/octave. **Voltage Gain:** 22dB high level, 62dB phono. **Power Requirements:** 120V at 25 Watts.

CABINET: L 52 Also fits L 11, L 12, and L 62




C 30

STEREO PRE-AMPLIFIER

McIntosh
The Compendium

PANLOC BRACKETS: Right – **045-261** / Left – **045-262**

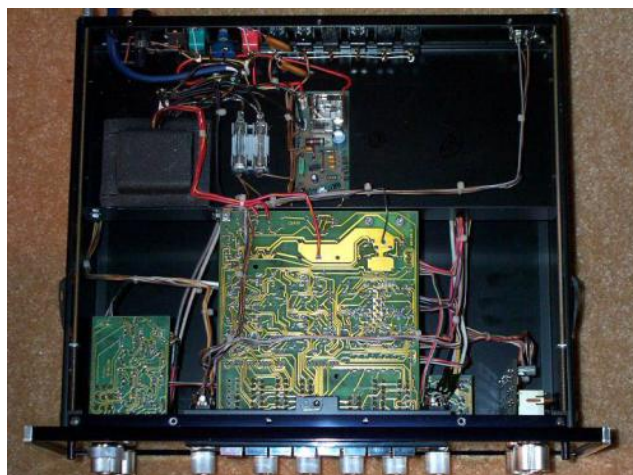

C 30 - Sold from 1985 - 1987. S/N: DM1001~DM2800 (1,799 UNITS)

Size: 5-7/16"H, 16"W and 13"D behind panel. **Weight:** 18 lb. **\$1,649.00**