

# C 32

## STEREO PRE-AMPLIFIER

McIntosh  
The Compendium



**FRONT PANEL:** Glass with illuminated teal/gold nomenclature. **LISTEN SELECTOR:** AUX, TUNER, TAPE 1, TAPE 2, TAPE 3, PHONO. **MODE SELECTOR:** L TO L+R, R TO L+R, STEREO REVERSE, STEREO, MONO (L+R), L+R TO L and L+R TO R. Program **EQUALIZER FREQUENCY** controls: 30, 150, 500, 1500 and 10K. **VOLUME**. ⚡ **RECORD SELECTOR:** AUX, TUNER, TAPE 1, TAPE 2, TAPE 3, PHONO. TAPE 3 INPUT and OUTPUT jacks. Pushbutton switches (with indicator lights): **PHONO:** 1 or 2, **RECORD MONITOR:** IN or OUT, **EQ:** IN or OUT, **FILTERS:** LF: IN or OUT, HF: IN or OUT, **SPEAKER/OUTPUT:** 1 IN or OUT, 2: IN or OUT. **POWER:** ON or OFF. 2 **HEADPHONES** jacks – upper for electrostatic, lower for dynamic. **EXPANDER:** OFF to 2.0. Concentric **BALANCE:** L to R / **LOUDNESS:** FLAT to MAX. PANLOC buttons.



**BACK PANEL:** **OUTPUTS:** 2, 1, MAIN, LINE, TAPE 3, TAPE 2, TAPE 1. **INPUTS:** TAPE 3, TAPE 2, TAPE 1, TUNER, AUX, PHONO 2, PHONO 1. ⚡ Power cord. FUSE. AC outlets: 4 SWITCHED. **TURNTABLE POWER:** auto-on 2 unswitched AC outlets, **AUTO-MANUAL** switch, FUSE. Push terminals for Left and Right **MONITOR** amplifier speaker **OUTPUT**. **GROUND** binding post. **SPEAKER CONTROL RELAY** socket. Panloc mounting.



**TOP PANEL:** **MONITOR AMPLIFIER CONTROLS:** LEFT GAIN, input switch: RECORD or LISTEN and RIGHT GAIN. **EXPANDER** controls: LEVEL MATCH, SPEED: FAST, NORM and SLOW.

# C 32

## STEREO PRE-AMPLIFIER


# McIntosh

## The Compendium

**SPECIFICATIONS:** **Response:** 20-20kHz (+0 -0.5dB). **Distortion:** 0.05%. **Noise and Hum:** - 90dB Aux, -80dB Phono. **Output Rated:** 2.5v. **Output Impedance:** 220 ohms. **Load Impedance:** 5k. **Input Sensitivity and Impedance:** Aux 0.25V at 50k, Phono 2mV at 47k and 65pF. **Program Equalizer:** 30, 150, 500, 1500 and 10,000Hz boost or cut 12dB. **Headphone Amplifier:** 12W/ch into 8 ohms at 0.1% distortion. **LF Filter:** 50Hz at 12dB/octave. **HF Filter:** 7kHz at 12dB/octave. **Voltage Gain:** 20dB Aux, 62dB Phono. **Power Requirements:** 120V at 85 Watts.

**CABINET:** L 12 Also fits L 11, L 52, and L 62

**PANLOC BRACKETS:** Right - 0??-??? / Left - 0??-???

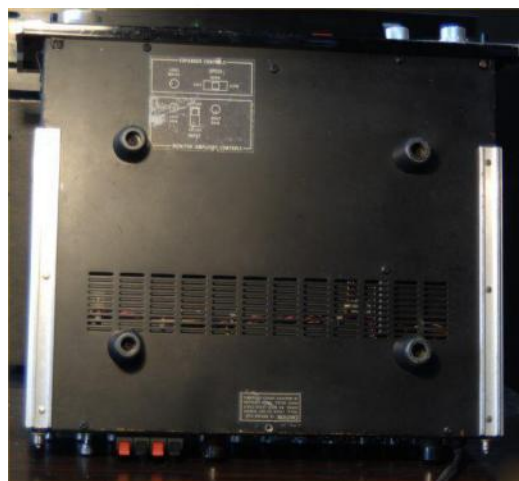

**C 32** - Sold from May 1977 - March 1982. S/N: AY1001~AY9600 (8,599 UNITS)

**Size:** 5-7/16"H, 16"W and 13"D behind panel. **Weight:** 27 lb. **\$1,649.00**