

# C 4P

## MONAURAL PRE-AMPLIFIER (WITH D8A POWER SUPPLY)

# McIntosh

## The Compendium



**FRONT PANEL:** Brass finish. SELECTOR: TAPE, TUNER, MIC, PHONO 1, PHONO 2. COMP: 629.16, 629.11, 800.16, 800.10. BASS boost: 0 to 5, cut: 0 to 5. TREBLE boost: 0 to 5, cut: 0 to 5. VOLUME: 1 to 10 with on-OFF switch. ⚡ Power indicator light.




**REAR PANEL:** Octal power and audio output socket. OUTPUTS: TAPE and MAIN. Tube cover. PHONO 2 LOAD switch: 6.8K to 52K. ⚡ 3 switched AC outlets. Power cord. INPUTS (with level controls): TAPE, TUNER, MIC, PHONO 1 and PHONO 2.

**SPECIFICATIONS:** Self powered by **D 8** power supply. **Response:** 20-20kHz. **Distortion:** 0.3%. **Noise and Hum:** -110dB high level, 2uV phono. **Output:** main 2.5V, 0.5V tape. **Input Sensitivity and Impedance:** high level 0.5V at 500k, phono 1 (5mV at 100k), phono 2 (5mV at variable 6.8k to 52k).

**TUBES:** 3-12AX7.

**CABINET:** L 52

**D 8 - Power supply for C 4 preamplifier. Tube: 5Y3GT**

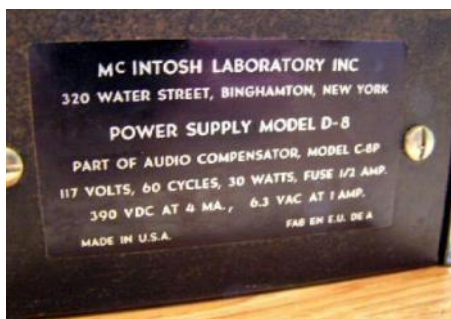


# C 4P

**MONAURAL PRE-AMPLIFIER  
(WITH D8A POWER SUPPLY)**

# McIntosh

**The Compendium**

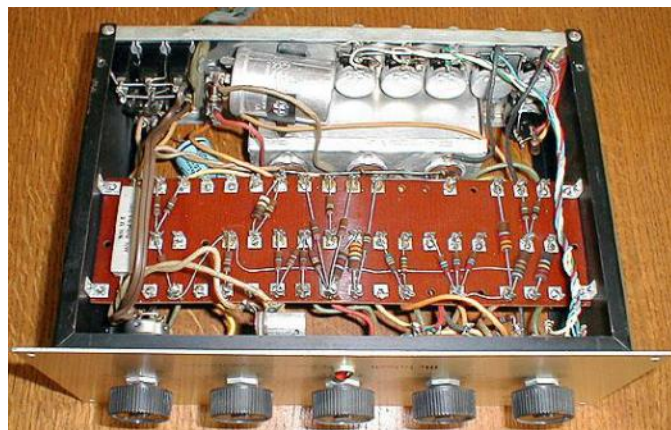

**C 4P** - Sold from 1954 - 1959. S/N: ????~???? (???? UNITS)

**Size:** 3-9/16"H, 10-1/8"W and 9"D. **Weight:** 7 lb, 4 oz. **\$84.45**. **C 4PB** (with blonde cabinet **\$94.45**). **C 4PM** (with mahogany cabinet **\$94.45**)

**D 8** - **Size:** 2-1/4"H, 6"W and 4-7/8"D. **Weight:** 3 lb, 6 oz.