

C 28

STEREO PRE-AMPLIFIER

McIntosh
The Compendium



FRONT PANEL: Glass with illuminated teal/gold nomenclature. Concentric **BALANCE:** L TO R, / **COMP:** PRES, FLAT LOUD. **INPUT SELECTOR** (with indicator lights): AUX, TUNER, PHONO 1, and PHONO 2, MIC, TAPE HD. **MODE SELECTOR** (with indicator lights): L TO L+R, R TO L+R, STEREO REVERSE, STEREO, MONO (L+R), L+R TO L and L+R TO R. **VOLUME** with on-OFF switch. ⚡ **BASS** controls: LEFT and RIGHT. Pushbutton switches: **MONITOR:** TAPE 1 IN or OUT, TAPE 2 IN or OUT, TAPE COPY: 1→2, TAPE COPY: 2→1. **FILTERS:** LF IN or OUT, HF: IN or OUT, **SPEAKER OFF:** MAIN and REMOTE. TAPE INPUT jack. TAPE OUTPUT jack. HEADPHONES jack. **TREBLE** controls: LEFT and RIGHT.



BACK PANEL: AC outlets: 2 **POWER AMP** (switched at top panel), 1 **UNSWITCHED**, 4 **SWITCHED** (at front panel). Power cord. **FUSE**. ⚡ **MAIN OUTPUTS** (2 pair): L, center, R. **SPEAKER CONTROL RELAY** socket. ⚡ Left and Right **LINE OUTPUT**. TAPE 1 and TAPE 2 Left and Right **OUTPUTS**. ⚡ **HIGH LEVEL INPUTS:** AUX, TUNER, TAPE 1, TAPE 2. **GROUND** binding post. **LOW LEVEL INPUTS:** Tape HEAD, MIC, PHONO 1 and PHONO 2. Panloc mounting.



TOP PANEL: LEFT and RIGHT **BASS** trim. LEFT and RIGHT **PHONO 1** and **PHONO 2** **LEVEL** controls. LEFT and RIGHT **HEADPHONES** **LEVEL** controls. LEFT and RIGHT **OUTPUT** **LEVEL** controls. **CENTER CHANNEL** **LEVEL** control. **POWER AMPLIFIER** switch: OFF or ON.

C 28

STEREO PRE-AMPLIFIER


McIntosh

The Compendium

SPECIFICATIONS: **Response:** 20-20kHz (+0 -0.5dB). **Distortion:** 0.1%. **Noise and Hum:** - 90dB aux, -78dB phono. **Output Rated:** 2.5V. **Output Impedance:** 100ohms. **Load Impedance:** 47k. **Input Sensitivity & Impedance:** aux 0.25V at 250k, 2mV at 47k, mic 2.5mV at 500k. **Tone Controls:** bass +20dB to -20dB, treble +18 to -18dB. **Center Channel Output:** 1.25V. **Headphone Amplifier:** 0.75V at 8 ohms. **LF Filter:** 50Hz at 12dB/octave. **HF Filter:** 7kHz at 12dB/octave. **Bass Trim Controls Boost:** up to 6dB below 100Hz. **Voltage Gain:** 20dB aux, 62dB phono.

CABINET: L 12 Also fits L 11, L 52, and L 62

PANLOC BRACKETS: Right - 043-622 / Left - 043-623

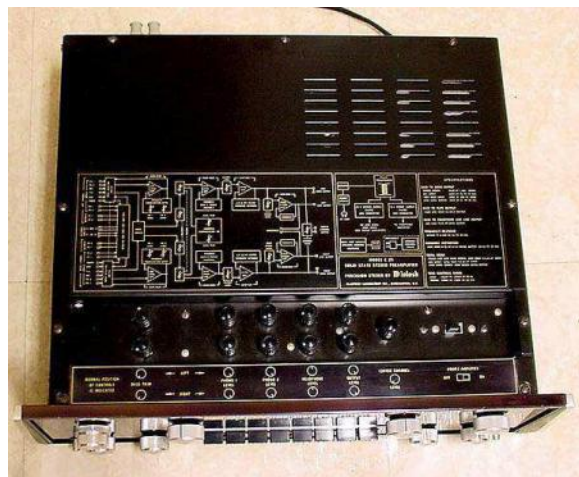

C 28 - Sold from January 1970 - December 1978. S/N: 10X01~99X99, AK1001~AK9999 & AS1001~AS4957 (21,764 UNITS)

Size: 5-7/16"H, 16"W and 13"D behind panel. **Weight:** 25 lb. **\$649.00**